


BioHiTech Seed[®] and BioHiTech Sprout[®]

Cost-Effective Technology Solutions for Low Volume Food Waste Generators

- Cuts food waste disposal costs
- Valuable supply chain management tool
- Eliminates odors, leaks and pests
- Space-saving compact footprints
- Supports CSR reporting
- Complies with food waste regulations
- Remote waste data connectivity
- Labor-saving technology

BioHiTech's Full Service Program

- No upfront costs or capital investment
- No unexpected service charges
- Includes maintenance and supplies
- Dedicated training, account management and 24/7 service provided
- Customer web platform provides up to the minute usage and reporting
- Mobile access available with **BioHiTech Cirrus[®]** app
- Chat-based access available with **BioHiTech Alto[™]**

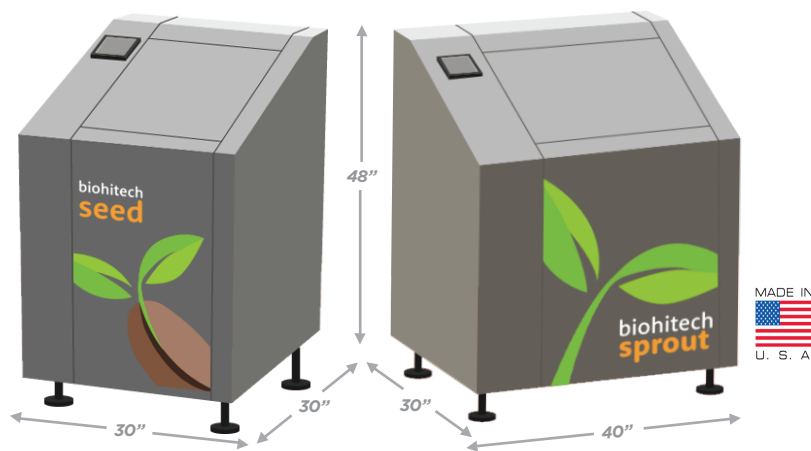

Ideal for Full and Quick Service Restaurants, Grocery and Natural Food Stores, Diners, Healthcare and Nursing Homes

MACHINE SPECIFICATIONS

		Seed		Sprout	
Capacity Pounds per 24 hours		up to 500 lbs	up to 227 kg	up to 650 lbs	up to 295 kg
Dimensions	Width	30 in	76 cm	40 in	102 cm
	Depth	30 in	76 cm	30 in	76 cm
	Height	48 in	123 cm	48 in	123 cm
Weight		535 lbs	243 kg	670 lbs	304 kg
Power Source	United States		115 Volt	United States	115 Volt
	International		220/230V 50/60Hz	International	220/230V 50/60Hz

WHAT CAN YOU FEED THE DIGESTERS

- meat
- poultry
- dairy
- grains
- pastries
- seafood
- produce
- prepared foods
- bread

INSTALLATION REQUIREMENTS: To be completed by the customer before installation

- Fast and flexible Installation in less than two hours
- Fits through standard doorways
- Simple plumbing connection
- Internet access